Chatbox Solo

Work in solitude for as long as you need

A spacious, ergonomic, and private workspace, and it's all for you.







Keep your conversations private while keeping background noise out.

Made by the team behind Silen Space, the Chatbox is a simplified version of our most popular phone booth, leaving only the essential purpose in its simplest functional form.

Ventilation

Chatbox uses a technology that keeps the booths ventilated, ensuring fresh air throughout your time spent inside.

Quick assembly

It takes about an hour for two people to assemble.

Accessories? Check

Whiteboard and screen brackets with cable management are available for Chatbox.

Standard exterior colors

Black (RAL9011)
White (RAL9003)

Standard interior color

Dark gray

Colour collection for additional price

Misty Creek (RAL6033)

Evergreen (RAL6020)

Estonian Mustard (RAL 1024)

Charming Smoke (RAL 7039)

Sangria (RAL 4002)


Ocean Tide (RAL 5003)





CHATBOX SOLO


CHATBOX SILEN








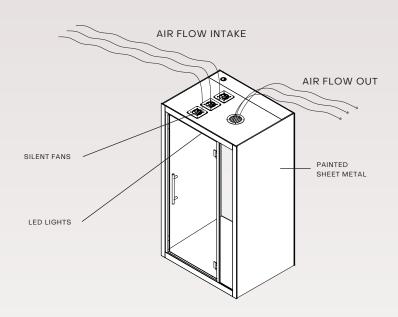











Technical specification

GENERAL PRODUCT INFO

Exterior size	125 × 222 × 98 cm
(W×H×D)	49.2 × 87.4 × 38.6 in
Interior size	113 × 204 × 91 cm
(W×H×D)	44.5 × 80.3 × 35.8 in
Weight (net)	380 kg / 838 lb
Door handedness	right-handed door
Air ventilation	low consumption air circulation system (max 5.1 W)
Air flow	air circulation speed is more than 55 l/s (198 m³/h) (117 ft³/min)
Lighting	energy-efficient LED light (28 W, 4000 K, 2240 lm)
Power outlets	1 × 110-230 V + 1 × USB-A/C
Power cord	3 m / 9 ft 10 in
Exterior material	painted sheet metal
Glass	sound control laminated safety glass
Floor	antistatic and stain resistant low loop pile carpet for public spaces, EN 1307
Acoustic surfaces	acoustic EchoFree panel
Adjustable glides	for easy leveling from inside the booth

CERTIFICATION

Electrical safety	CE-mark
Fire safety	Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling)
Emissions	Indoor Advantage™ Gold certified by SCS Global Services
Sound reduction	29,4 db (class B according to ISO 23351-1)
Airborne sound insulation R'w	34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist
Sound transmission class STC	34 dB according to ASTM E90, measured on site by an accredited specialist



Extra features







Retractable coat/bag hook

Air flow and lighting dimmer

Occupancy light

EXTRA FEATURE

Retractable coat/bag hook	A practical and nice-looking foldable hook for coat or bag
Air flow and lighting dimmer	A well-designed and functional touch screen to adjust air-flow speed and lights to create your own comfort zone
Occupancy light	

Options for surfaces

Exterior colors collection









White RAL 9003

Black RAL 9011

Misty Creek (RAL6033)

Evergreen (RAL6020)

Mustard



Charming Smoke (RAL 7039)



Sangria (RAL 4002)



Ocean Tide (RAL 5003)



Whiteboard paint



Slatted wall

Standard wall and ceiling



Dark gray

Standard floor



Standard profiles



Black

